



KOTZUR

K-RAIL & K-RAIL PLUS



A family
owned
Australian
business



APPLICATION

Versatile fencing product suitable for a variety of applications

Stock yards, holding pens, stock crates and rural and domestic fences.


FEATURES

- Available in 5 thicknesses and 2 widths.
- Standard Z450 Galvanised coating..
- Made from High Tensile steel - light weight but very strong.
- Rolled edges and wide rail means people and stock friendly.
- Highly visible for good stock movement.
- Fast and easy to install - welded or screwed into position.
- Available in standard 6 metre lengths as standard or cut special lengths to your requirements.
- Proven over 15 years in all environments

K-RAIL


STANDARD K-RAIL 165MM WIDE (NOM)	MASS KG/M	METRES PER TONNE
0.6 Galvanised	1.16	862
0.8 Galvanised	1.48	673
1.0 Galvanised	1.80	556
1.2 Galvanised	2.10	476
1.6 Galvanised	2.80	355

KOTZUR K-RAIL SECTION

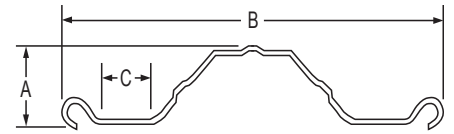


A=32mm B=160mm (nominal) C=22mm

SHEEP YARD PANEL SPACING

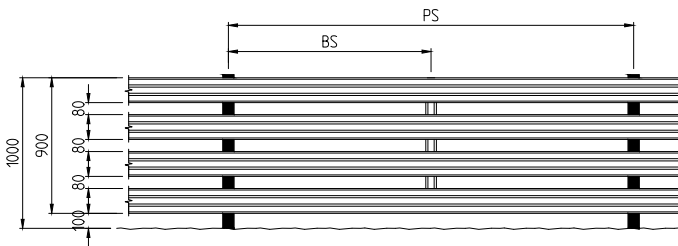

*PS= 2.4m (forcing area) 3.6m (holding area)
*BS= 1.2m (forcing area) 1.5m (holding area)

CATTLE YARD PANEL SPACING

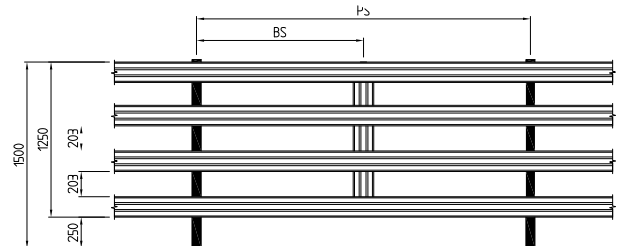


*PS= 2.4m (forcing area) 3.0m (holding area)
*BS= 1.2m (forcing area) 1.5m (holding area)

K-RAIL PLUS


K-RAIL PLUS 225MM WIDE (NOM)	MASS KG/M	METRES PER TONNE
0.6 Galvanised	1.47	680
0.8 Galvanised	1.88	525
1.0 Galvanised	2.29	434
1.2 Galvanised	2.67	371

KOTZUR K-RAIL PLUS SECTION

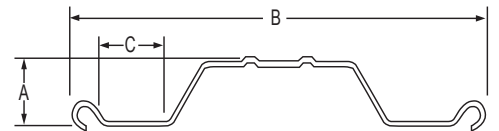


A=32mm B=230mm (nominal) C=36mm

SHEEP YARD PANEL SPACING

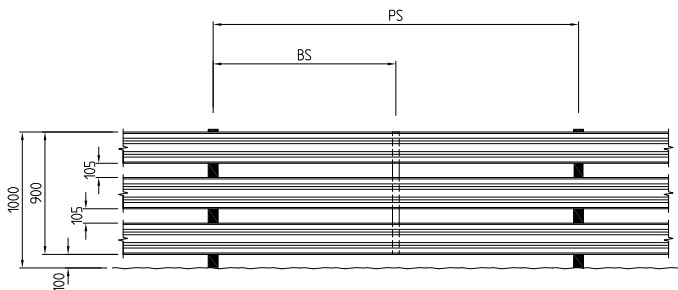

*PS= 2.4m (forcing area) 3.6m (holding area)
*BS= 1.2m (forcing area) 1.8m (holding area)

CATTLE YARD PANEL SPACING

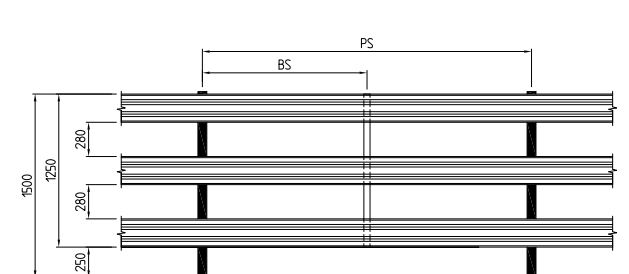

*PS= 2.4m (forcing area) 3.0m (holding area)
*BS= 1.2m (forcing area) 1.5m (holding area)

*PS: Panel Spacing *BS: Batton Spacing

Whilst every care has been made in the preparation of this brochure, the company does not accept responsibility for inadvertent errors. It reserves the right to make changes and improvements to its products without further notice 01/07/2023