

# Relief Valve Fitting Instructions


## This kit includes:

- 1x Relief Valve
- 1x 2L Hyspin AWS 32 Hydraulic Oil
- 1x 50mm Poly Elbow
- 2x 50mm Steel Washers




**Fitting the relief valve to the silo requires 2 persons**


## Set up instructions:

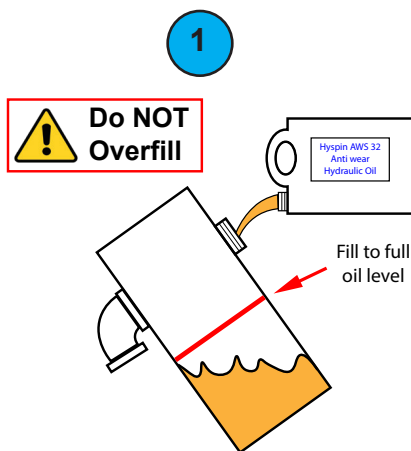


Tilt Relief valve on side and fill to the FULL OIL LEVEL as shown on the side of the relief valve. **DO NOT overfill! Even small increases in oil can potentially over pressure the silo.** Spare oil for future top up requirements.

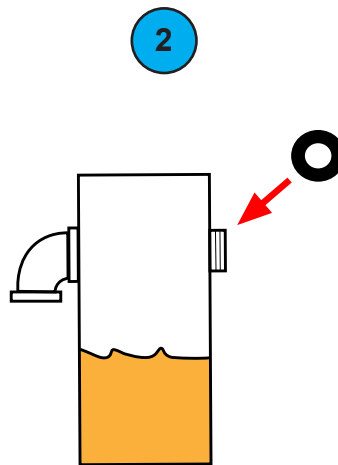


Fit the 50mm rubber washer to relief valve.

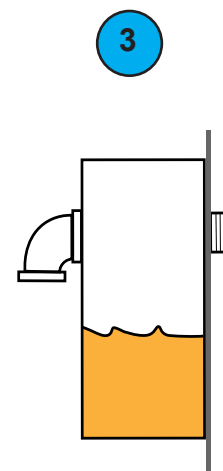


Position relief valve onto silo wall.

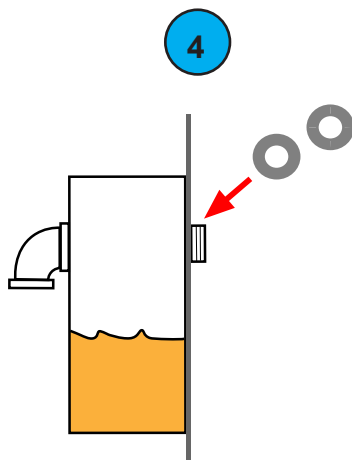

On the inside of silo wall add 2 x 50mm metal washers.

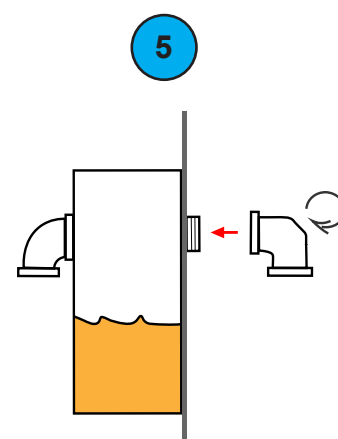

Screw on 50mm poly elbow

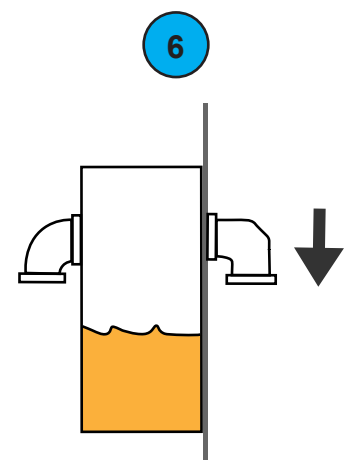

Make sure inside poly elbow opening is facing down.